




FORM PTO-1390 (REV. 12-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER N8382-EAS-Urg
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/088815
INTERNATIONAL APPLICATION NO. PCT/GB00/03650	INTERNATIONAL FILING DATE 21 September 2000	PRIORITY DATE CLAIMED 21 September 1999	
TITLE OF INVENTION Fire Escape Apparatus			
APPLICANT(S) FOR DO/EO/US Kevin David Williams			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p>a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>a. <input type="checkbox"/> is attached hereto.</p> <p>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>d. <input checked="" type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</p> <p>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11 to 20 below concern document(s) or information included:</p> <p>11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</p> <p>20. <input type="checkbox"/> Other items or information:</p>			

U.S. APPLICATION NO. 10/088815		INTERNATIONAL APPLICATION NO. PCT/GB00/03650		ATTORNEY'S DOCKET NUMBER N8283-EAS-Urg	
---------------------------------------	--	--	--	--	--

<p>21. <input checked="" type="checkbox"/> The following fees are submitted:</p> <p>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</p> <p>Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. \$1040.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00</p> <p>International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00</p> <p>International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00</p> <p style="text-align: center;">ENTER APPROPRIATE BASIC FEE AMOUNT =</p> <p>Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%;">CLAIMS</th> <th style="width: 20%;">NUMBER FILED</th> <th style="width: 20%;">NUMBER EXTRA</th> <th style="width: 20%;">RATE</th> <th style="width: 20%;">\$</th> </tr> <tr> <td>Total claims</td> <td>- 20 =</td> <td></td> <td>x \$18.00</td> <td>\$</td> </tr> <tr> <td>Independent claims</td> <td>- 3 =</td> <td></td> <td>x \$84.00</td> <td>\$</td> </tr> <tr> <td colspan="4">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$280.00</td> </tr> <tr> <td colspan="4" style="text-align: right;">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$ 890.00</td> </tr> <tr> <td colspan="4"> <input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2. </td> <td>\$ <445.00></td> </tr> <tr> <td colspan="4" style="text-align: right;">SUBTOTAL =</td> <td>\$ 445.00</td> </tr> <tr> <td colspan="4">Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</td> <td>\$</td> </tr> <tr> <td colspan="4" style="text-align: right;">TOTAL NATIONAL FEE =</td> <td>\$ 445.00</td> </tr> <tr> <td colspan="4">Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +</td> <td>\$</td> </tr> <tr> <td colspan="4" style="text-align: right;">TOTAL FEES ENCLOSED =</td> <td>\$ 445.00</td> </tr> <tr> <td colspan="4"></td> <td style="text-align: right;">Amount to be refunded: \$</td> </tr> <tr> <td colspan="4"></td> <td style="text-align: right;">charged: \$</td> </tr> </table> <p>a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>445.00</u> to cover the above fees is enclosed.</p> <p>b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>23-0035</u>. A duplicate copy of this sheet is enclosed.</p> <p>d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.</p> <p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.</p> <table style="width: 100%;"> <tr> <td style="width: 60%;"> SEND ALL CORRESPONDENCE TO: Emily A. Shouse Waddey & Patterson 414 Union Street, Suite 2020 Bank of America Plaza Nashville, TN 37219 </td> <td style="width: 40%; vertical-align: bottom;"> <div style="text-align: center;">  SIGNATURE </div> <div style="text-align: center;"> <u>Emily A. Shouse</u> NAME </div> <div style="text-align: center;"> <u>44,336</u> REGISTRATION NUMBER </div> </td> </tr> </table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	Total claims	- 20 =		x \$18.00	\$	Independent claims	- 3 =		x \$84.00	\$	MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$280.00	TOTAL OF ABOVE CALCULATIONS =				\$ 890.00	<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$ <445.00>	SUBTOTAL =				\$ 445.00	Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	TOTAL NATIONAL FEE =				\$ 445.00	Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$	TOTAL FEES ENCLOSED =				\$ 445.00					Amount to be refunded: \$					charged: \$	SEND ALL CORRESPONDENCE TO: Emily A. Shouse Waddey & Patterson 414 Union Street, Suite 2020 Bank of America Plaza Nashville, TN 37219	<div style="text-align: center;">  SIGNATURE </div> <div style="text-align: center;"> <u>Emily A. Shouse</u> NAME </div> <div style="text-align: center;"> <u>44,336</u> REGISTRATION NUMBER </div>
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$																																																															
Total claims	- 20 =		x \$18.00	\$																																																															
Independent claims	- 3 =		x \$84.00	\$																																																															
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$280.00																																																															
TOTAL OF ABOVE CALCULATIONS =				\$ 890.00																																																															
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$ <445.00>																																																															
SUBTOTAL =				\$ 445.00																																																															
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$																																																															
TOTAL NATIONAL FEE =				\$ 445.00																																																															
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$																																																															
TOTAL FEES ENCLOSED =				\$ 445.00																																																															
				Amount to be refunded: \$																																																															
				charged: \$																																																															
SEND ALL CORRESPONDENCE TO: Emily A. Shouse Waddey & Patterson 414 Union Street, Suite 2020 Bank of America Plaza Nashville, TN 37219	<div style="text-align: center;">  SIGNATURE </div> <div style="text-align: center;"> <u>Emily A. Shouse</u> NAME </div> <div style="text-align: center;"> <u>44,336</u> REGISTRATION NUMBER </div>																																																																		

10/088815

-1-

Fire Escape Apparatus

This application relates to fires escape apparatus and in particular to fire escape apparatus suitable for use in locations where escape requires a movement from a first level to a second lower level.

Various types of fire escape which allow humans to escape from a fire by moving from a first level to a second lower level have been proposed. Such fire escapes may be split into two broad categories: fixed and deployable. Fixed fire escapes generally have a permanent structure. They generally comprise a ladder and/or stairs permanently fixed in position to the outer face of a building or other structure. This application is not concerned with fixed fire escapes.

Deployable fire escapes are generally stored within a building or other structure and only deployed at such time as they are needed. The present invention relates to a new deployable fire escape.

According to the present invention there is provided a fire escape apparatus suitable for use where escape requires a movement from a first level to a second lower level. The fire escape apparatus comprises a casing, a flexible ladder and a means for deploying said ladder; in which the casing has a mouth and is of sufficient dimension to contain the flexible ladder when that ladder is not in use. The deployment means includes a spacer means and one or more handle means. The deployment means may be reversibly

-2-

reconfigured between a storage configuration and a deployed configuration.

5 It is most preferred that the casing has a base, first and second side walls and front and back walls extending between the first and second side walls. In this configuration the mouth of the casing is an aperture between the side walls and the front and back walls opposite the base. The mouth allows access to the inside
10 of the casing from outside the casing. It is particularly preferred that an edge of each of the side and front and back walls are joined to the base. Most preferably, the joints between the walls and/or the base are gas and liquid tight. It is preferred that the material forming the base
15 and the walls of the casing is likewise gas and liquid tight. Most preferably, the material of the casing is also fire proof. Sheet metal is a particularly preferred material for the casing.

20 In a preferred embodiment each handle means has an associated handle channel either located within the casing, on an outside face of the casing, or integral with a wall of the casing. Each handle channel is preferably dimensioned and configured to allow reversible movement of
25 a handle means along said channel. It is most preferred that the handle means moves along the handle channel when the deployment means is reconfigured.

30 It is most preferable that a portion of each handle means projects from the end of the handle channel associated with the handle means when the deployment means is in the

-3-

deployed configuration. This is particularly desirable because it is often the case that a user of the fire escape apparatus will need something to hold on to whilst climbing onto the top of the flexible ladder which has, by then, been deployed. The presence of one or more handle means makes the act of climbing onto the flexible ladder considerably safer and easier.

In one embodiment it is preferred that portions of the handle means project in a direction away from the casing. Most preferably, the handles project out of the casing in the region of the mouth of the casing, or through the mouth of the casing.

A or each handle means may include means adapted to aid a user to locate the apparatus of the present invention once the deployment means is in the deployed position. Such means may include a flashing light or means for producing an audible signal such as pulses of sound.

Each handle channel or handle means may be provided with one or more stop means that serve to limit the movement of the handle within the handle channel. That limitation is most preferably to movement between a stored position and a deployed position. The stop means are most preferably in the form of projections into the channel that obstruct movement of the handle in the handle channel, or projections attached to the handle projecting into a slot in the handle channel, said slot having closed ends, or other means of obstructing the travel of the projections along the slot.

-4-

The spacer means is preferably constructed and configured to move from a storage position to a deployed position. It is most preferred that the movement of the spacer means between the stored position and deployed position occurs when the deployment means is reconfigured between its storage configuration and deployed configuration, or the reverse re-configuration.

The purpose of the spacer means is to, when deployed, hold the flexible ladder a predetermined distance away from the casing. In use this equates to the spacer means holding the flexible ladder a predetermined distance away from the face of the building or other structure to which the fire escape apparatus is attached. Holding the flexible ladder away from the face of the building or other structure to which the fire escape apparatus is fixed has the benefit of rendering use of the flexible ladder safer and easier.

It is preferred that the spacer means when in the storage position is at least partially within the casing, most preferably it is substantially within the casing.

The spacer means may be pivotally engaged with at least one handle means. In this embodiment, the spacer means may pivot relative to the handle means when the deployment means is reconfigured. In one particularly preferred embodiment of the present invention the handle means and a portion of the spacer means rest substantially adjacent to each other when in the storage position. When the deployment means is reconfigured to the deployed position, the spacer means pivots about a pivot on the handle means

-5-

through a predetermined angle.

In a most preferred embodiment, the spacer means comprises first and second lateral bars disposed substantially parallel to each other, each lateral bar being pivotally engaged with a handle means substantially at a first end of the lateral bar and being fixed to a spacer bar extending between said first and second lateral bars substantially at or adjacent to the second end of said lateral bars. Most preferably the spacer means has, when viewed from a position substantially perpendicular to a plane passing through both lateral bars and the spacer bar, the appearance of three sides of a rectangle or square. In use, the flexible ladder rests against the spacer bar, and the lateral bars hold the spacer bar out from the face of the building or other structure.

Optionally, in a further embodiment, each lateral bar includes a grip portion at or adjacent to the second end of the lateral bar. The grip portion may be attached to the lateral bar by normal attachment means, or may be integral with the lateral bar. The grip portion is preferably of such dimensions and configuration as to allow a human hand to obtain a good grip on that portion.

25

In a preferred embodiment the deployment means further includes a second ladder means. The second ladder means is shorter than the flexible ladder and the second ladder means is adapted to move from a storage position to a deployed position on re-configuration of the deployment means.

30

-6-

The second ladder is preferably stored at least partially, and preferably substantially, within the casing when in the storage position.

5 The second ladder means preferably includes at least one ladder support means, at least one rung and at least one rung support means. The ladder support means may be pivotally engaged with at least one handle means and pivot
10 relative to the handle means when the deployment means is reconfigured.

It is most preferred that the ladder support means comprises first and second support bars disposed substantially parallel to each other, each support bar
15 being pivotally engaged with a handle means substantially at a first end of the support bar and engaged with a rung support means substantially at the second end.

It is most preferred that the spacer means and the ladder support means are each pivotally attached to the same pivot
20 means on each handle means to which they are attached. This reduces the number of pivot points within the apparatus and simplifies mechanical construction. Most preferably the spacer means and the ladder support means
25 pivot around each pivot to which they are attached in opposite directions when the deployment means is reconfigured. Thus if in the storage position the or each handle means, the spacer means, and the ladder support means are all substantially co-planar; when the deployment
30 means is reconfigured the handle means moves, but remains in the same plane, and the spacer means and the ladder

- 7 -

support means move to positions either side of that plane.

It is preferred in one embodiment that at least one pivot is provided with means to limit the degree of rotation of one or both of the spacer means and ladder support means. 5 It is particularly preferred that each of the spacer means and ladder support means may pivot through approximately 90° relative to the handle means. In one embodiment, the handle means is substantially straight, and the spacer 10 means and the ladder support means are configured so that they have a small dimension in a first direction compared to the dimensions in a second and third direction when the first, second and third directions are mutually perpendicular. In this embodiment the handle means, ladder 15 support means, and spacer means can move from the stored position in which they are substantially co-planar to the deployed position, when the spacer means and ladder support means are again substantially co-planar, but on opposite sides of the axis about which they have pivoted, and the 20 handle means is orientated substantially perpendicularly to the plane of the spacer means and ladder support means.

Alternatively, or in addition to stops being provided on the pivot means, stop means may be located on the spacer 25 means and/or ladder support means.

In the most preferred embodiment of the present invention there are two handle means. When those handle means are in the deployed position, at least a portion of the mouth of 30 the casing is located between the handle means. Most preferably, the handle means have a substantially straight

-8-

longitudinal axis and a first end of the handle means is configured to be easily gripped in a human hand. Preferably, the majority of each handle is substantially circular in cross section except for at the first end of the handle means.

The flexible ladder may be of any appropriate ladder construction. Most preferably it is comprised of a plurality of rungs, said rungs being fixed at substantially even spacings to a pair of longitudinal flexible rung supports. Said rung supports can be steel wire, chain, or other non-flammable flexible structure.

It is preferred that a first end of the ladder is attached to the base of the casing. Such attachment may be by standard means such as bolts, welding, or other appropriate means. The second end of the flexible ladder is most preferably provided with means adapted to releasably engage with the spacer means. When the second end of the flexible ladder is so configured, the movement of the spacer means from its stored position to its deployed position causes the second end of the ladder to be pulled through the mouth of the casing. Once the second end of the ladder has been pulled through the mouth of the casing, a user of the fire escape apparatus may then use the portion of the ladder pulled through the mouth of the casing to pull the remainder of the ladder out of the casing. In practice it will be found that because of the weight of the ladder, once a certain amount of the ladder has been pulled out of the casing and allowed to hang down the face of the structure to which the fire escape apparatus is attached,

-9-

the weight of the deployed ladder will be sufficient to cause the remainder of the ladder to be deployed without further intervention from the user.

5 The fire escape apparatus of the present invention is, in a further preferred embodiment, provided with a removable closure means for the mouth of the casing. The closure means may, if so desired, be provided with seal means to cause the closure of the casing to be substantially fluid
10 or gas tight.

In use, the presence of a closure member closing the mouth of the casing when the deployment means is in the storage position and the flexible ladder is within the casing is
15 preferable because the closure member will prevent unwanted dirt, rubbish or other material from entering the casing and potentially jamming the deployment means or the flexible ladder within the casing. Where the apparatus of the present invention is to be used in environments that
20 are wet and/or hostile to the materials from which the apparatus is constructed, it is preferred that the closure member includes an appropriate seal means to prevent such a hostile environment damaging the apparatus of the present invention and, possibly, rendering it unserviceable.

25

The closure member is preferably provided with one or more releasable latch means to latch the closure member in a closed position.

30

In the most preferred embodiment of the present invention, the deployment means is provided with means or an energy

-10-

source which can be utilised to cause the re-configuration of the deployment means from its stored position to its deployed position to occur without a user of the apparatus having to physically manipulate the apparatus. Most preferably this energy is provided by biasing. The biasing means may be one or more compression springs, each of those springs are held in a compressed state by a latch means until the actuation means causes release of the latch means. In alternative embodiments, the energy necessary to cause the deployment means to reconfigure may be obtained from a compressed gas source, a source of electricity, or any other appropriate energy storage means or source.

It is most preferred, when the casing is provided with a closure means, that the actuation means for the energy source be activated when the closure means is removed from the casing.

In an alternative embodiment, the actuation means for the energy source is activated from a position or by means remote from the apparatus of the present invention. The means may include a fire alarm system for a building, or a user operated switch.

The apparatus of the present invention may also include one or more alert means. The alert means preferably detect and react to either the removal of the closure means from the casing, if present, or the re-configuration of the deployment means. The alert means may communicate the occurrence of the event that it is designed to detect by one or more of: communicating the occurrence of the event

-11-

to an emergency service such as the fire service; cause a fire alarm to sound; or cause a local indication that the detected event has occurred, for example in the form of a flashing light source. The alert means may communicate the occurrence of an event via either electromagnetic radiation signals, or via fixed, solid state wiring.

The apparatus of the present invention may be used in a wide variety of locations and with a wide variety of structures. It is particularly preferred, however, that the apparatus of the present invention be used in buildings which include a structural frame, an inner skin and an outer skin. The apparatus is configured to be fixed to the structural frame and located between the inner and outer skins. The apparatus is preferably orientated so that the mouth of the casing faces substantially upwards and the apparatus is fixed beneath an aperture in the inner and outer skins. Most preferably, this aperture is a window. In this instance, the casing is provided with a closure means which also forms at least part of the window sill when the closure means is closing the mouth of the casing.

A particular advantage of using the apparatus of the present invention in the above described fashion is that the fire escape apparatus can be built into the fabric of a building when the building is constructed and can remain there until such time as it is necessary, if at all. The appearance of the inner skin of the building, e.g. the inner wall of a room, is not in any way detracted from by the apparatus of the present invention. This will make fitting apparatus of the present invention into a building

-12-

much more cosmetically acceptable than has been the case in connection with previously known fire escape apparatus.

5 In an alternative embodiment of the apparatus of the present invention, whichever of the front or back walls of the casing that is to face toward the inside of the building can either be constructed to include one or more fluid tight passages interconnected with each other, an input port and an output port so as to form a radiator for
10 use as part of a central heating system. Alternatively, a wall of the casing can be so configured to allow the mounting of a radiator onto that wall. In this embodiment, the radiator hides the apparatus of the present invention.

15 A second location within a building that it may be desired to fit the apparatus of the present invention is within a parapet wall at the top of a flat roofed building, or around a balcony. Again, because the apparatus of the present invention can be built into the parapet wall there
20 is no unsightliness caused by the apparatus of the present invention and, as such, its presence in a building is much more acceptable than previously known fire escapes.

25 An alternative preferred location for apparatus of the present invention is use on sailing vessels or ships or boats. Most preferably the apparatus could be fixed to the hull of the sailing vessel adjacent to the junction of the hull and a deck. The apparatus should be fixed either
30 beneath an aperture in the hull, if it is being fixed below the top deck, or just below the top edge of the hull.

-13-

Where the apparatus is to be used on a sailing vessel, it is particularly important that the casing is provided with a closure means and that there is a seal on that closure means. It is undesirable for sea water to enter the casing and risk corroding the flexible ladder and/or deployment means when they are in their storage position.

In use, a user will go to wherever the apparatus is situated. He will remove the closure means to the casing (if one is employed), and either cause actuation of the energy source to cause the deployment means to move to its deployed position, or physically manipulate the deployment means to move it to its deployed position. Once the deployment means is at its deployed position, the user will pull the flexible ladder out of the casing and lower it down the side of the structure to be escaped from, whilst draping it over the spacer means. The weight of the ladder causes the deployment of the remainder of the flexible ladder without further intervention from the user once sufficient of the flexible ladder has been deployed.

If the embodiment of the apparatus that the user is using includes the second ladder means, that second ladder means will be caused to deploy in the opposite direction from the spacer means and will deploy a second ladder down the inside face of the structure to be escaped from. When the flexible ladder is fully deployed the user may climb up the second ladder whilst holding on to the handle means, transfer himself from the second ladder to the flexible ladder, and then climb down the flexible ladder so escaping the fire.

-14-

The fire escape means of the present invention may be re-packed into the casing by a reverse procedure to deploying the fire escape means. The flexible ladder will have to be pulled up to the level of the apparatus and if compression springs are used as the energy source for the deployment means, those springs will have to be recompressed. Thus the fire escape apparatus of the present invention may be re-used or deployed on a regular basis to ensure that it remains in working order.

The present invention will be further described and explained by way of example and with reference to the accompanying drawings in which:

Figure 1 shows a perspective view of an embodiment of the apparatus of the present invention when the deployment means is in the storage position;

Figure 2 shows the apparatus of Figure 1 when the deployment means is between the storage position and the deployed position;

Figure 3 shows the apparatus of Figure 1 when the deployment means is in the deployed position;

Figure 4 shows an elevation of the apparatus as in Figure 3 when located within a building when viewed from outside the building; and

Figure 5 shows a side elevation of the apparatus of Figure 4.

-15-

With reference to Figure 1, a fire escape apparatus (2) is comprised of a deployment means (4), a flexible ladder (6) and a casing (not shown). The casing includes base plate (8) and extends between a first and second handle channel (10, 12). The casing is omitted from Figure 1 for clarity.

Flexible ladder (6) is composed of a number of rungs (14, not all of which are numbered in Figure 1). Rungs (14) extend between steel rung support cables (16) and are fixed thereto at substantially even spacing. Rung support cables (16) each have a first end connected to base plate (8). The connection is by way of a standard steel wire connection means.

Deployment means (4) comprises, as is better illustrated in Figures 3 and 5, a spacer means (18) and a second ladder means (20). Spacer means (18) comprises a pair of lateral bars (22a, 22b) and a spacer bar (24). Spacer bar (24) is combined with a casing closure means (26). Casing closure means (26) closes the mouth (not shown) of the casing (not shown) through which ladder (26) and deployment means (4) extends when in the deployed position as shown in Figure 3.

Second ladder means (20) comprises a pair of ladder support bars (28a, 28b). Each of ladder support bars (28a, 28b) is engaged with a rung support bar (30a, 30b respectively). Rung support bars (30a, 30b) engage with ladder support bars (28a, 28b) by way of a pin (32). Each pin (32) is fixed to a rung support bar (30a, 30b) and engaged in a longitudinal slot that extends along each ladder support bar (28a, 28b). Pins (32) are dimensioned and configured

-16-

so that they cannot be withdrawn from the longitudinal slots. Pin (32) is fixed to a first end of the associated rung support bar (30a, 30b). Fixed to the end of the rung support bar (30a, 30b) remote from pin (32) is a rung (34).
5 Rung (34) extends between the rung support bars (30a, 30b).

The length of ladder support bars (28a, 28b) and rung support bars (30a, 30b) is determined by the position where the fire escape apparatus (2) is to be located, the
10 dimensions of the structure surrounding that location, and the desired vertical distance between the rung (34) and the mouth of the casing (not shown). In alternative embodiments, not shown, rung support bars (30a, 30b) may either support further rung support bars and/or further
15 rungs.

Located within each of the handle channels (10, 12) in Figure 1 is a handle (11, 13 respectively). When the deployment means (4) is in its storage position, the
20 handles (11, 13) are fully retracted into the channels (10 and 12 respectively).

Referring to Figure 3, a portion of handles (11, 13) may be seen extending from their associated handle channels (10, 12 respectively). Extending between handles (11) and (13)
25 is a pivot bar (36). The ends of pivot bar (36) are fixed within the handles (11 and 13). Lateral bar (22a) and ladder support bar (28a) are both provided with apertures through which pivot bar (36) passes. The apertures are
30 adjacent to the ends of the bars remote from spacer bar (24) and rung bar (30) respectively. The apertures in

-17-

lateral bar (22a) and ladder support bar (28b) are dimensioned so as to allow the bars (22a) and (28a) to slidably rotate about pivot bar (36). Apertures of a similar location and dimension are provided in lateral bar (22b) and ladder support bar (28b).

As may be seen from Figure 3, when deployment means (4) is in the deployed configuration, lateral support bars (22) and ladder support bars (28) have substantially parallel longitudinal axes and are orientated, relative to pivot bar (36) in opposite directions.

Not shown in any of the figures is an energy storage means in the form of a compression spring located in each of handle channels (10) and (12). The compression spring is braced, at a first end, against base plate (8) and engages at a second end with the end of handle (11) and (13) proximal to base plate (8) or the ends of pivot bar (36) inside handles (11) and (13).

When the handles (11 and 13) are fully within the handle channels (10 and 12) the compression springs are under compression. Each of the handle channels (10 and 12) are provided with a latch means (not shown) which acts either on the compression spring itself, or, more preferably indirectly on the compression spring via the handles (11 and 13) or the ends of pivot bar (36). When the latch means are disengaged the compression springs bias the handles (11 and 13) into the position shown in Figure 2.

When the handles (11 and 13) reach the position shown in

-18-

Figure 2, pivot bar (36) comes clear of the casing, the top edge of which is shown by lines (40) on Figures 2 and 3. This allows spacer means (18) and second ladder support means (20) to pivot around pivot bar (36) into the position shown in Figure 3. Rung support bars (30a, 30b) and rung (34) may be deployed to the position shown in Figure 3 from the position shown in Figure 2 [wherein the pins (32) are in the longitudinal slot in bars (28a, 28b) nearest pivot bar (36)] to the position shown in Figure 3 either by a user pulling the rung (34) away from pivot bar (36) or by biasing means incorporated in ladder support bars (28a, 28b) (not shown). Gravity then causes rung (34) to hang vertically below the ends of ladder support bars (28b).

The rung (14) attached furthest along rung support cable (16) from base plate (8) is, whilst in the storage position shown in Figure 1 and whilst moving to deployment position as shown in Figure 3, releasably clipped to spacer bar (24) by clip means (not shown). When the deployment means is in the deployed position shown in Figure 3, the user unclips the rung (14) from spacer bar (24), and uses rungs (14) to pull ladder (6) out of the casing. The free end of the ladder (6) is passed over spacer bar (24) and allowed simply to drop under the force of gravity. When sufficient of ladder (6) has been passed over spacer bar (24), the weight of ladder (6) will pull the remainder of ladder (6) out of the casing until the rung support cables (16) are taut against the fixings of rung support cables (16) to base plate (8).

Once the flexible ladder has reached the position as shown

-19-

in Figure 3, that is with rung support cables (16) held taut, a user of the fire escape apparatus may climb up rung or rungs (34) so that they can climb easily over the apparatus and down flexible ladder (6) via rungs (14) so as to escape a fire. Whilst the user is climbing from rungs (34) to rungs (14) the user may grip one or both of handles (11) and (13) so as to provide balance and increase the safety of the operation.

Once it is no longer required that the apparatus of the present invention be deployed, the apparatus may be returned to its storage configuration. This is done by first placing the flexible ladder back into the casing then returning the deployment means (4) to the position shown in Figure 2, and finally resetting the energy storage means so that the handles (11, 13) can return to being wholly within the handle channels (10, 12).

In use, as illustrated in Figures 4 and 5, the apparatus of the present invention (2) is mounted within a structural framework including a pair of vertical struts (50, 52) either side of the apparatus (2), a beam (54), and a window frame (56). Base plate (8) is bolted (bolts not shown) to beam (54). The apparatus (2) is further provided with stabilising struts (not shown) extending laterally from the casing to the adjacent vertical struts (50, 52). The framework of the struts (50, 52), beam (54) and window frame (56) is typical of a structure to be found in a timber framed house.

The apparatus of the present invention (2) is located

-20-

between the outer skin (58) of the structure to which the apparatus is attached, and the inner skin (60). The outer skin (58) is comprised of a layer of brickwork, a cavity, and a sheath layer of, for example, plywood. The inner skin (60) is comprised of a layer of plasterboard with a plaster skim over the inner surface of said plasterboard. The apparatus further includes a cover plate (62) that is hinged to the inner skin of the structure (60) and which may move about the hinge line from a position wherein cover plate (62) acts as a part of the window sill for window (56) and hides apparatus (2) to the position shown in Figure 5 wherein the closure means (26) may be accessed by a user.

The apparatus of the present invention is preferably made of a fire resistant or fire-proof material. In particular, non-flammable metals are preferred because of their ease of mechanical working and their durability. It is particularly anticipated that the apparatus of the present invention may remain in position for long periods of time, and preferably the design life of the structure into which it is incorporated, and accordingly the materials need to be selected to ensure the apparatus has a sufficiently long design life.

-21-

Claims

1. Fire escape apparatus suitable for use in locations
5 where escape requires a movement from a first level to
a second lower level comprising a casing, a flexible
ladder, and a means for deploying said ladder; in
which the casing has a mouth and is of sufficient
10 dimensions to contain the flexible ladder when not in
use, the deployment means includes a spacer means and
one or more handle means, and in which the deployment
means may be reversibly reconfigured between a storage
configuration and a deployed configuration.
- 15 2. Fire escape apparatus according to claim 1 in which
the casing is comprised of a base, first and second
side walls, and front and back walls extending between
the first and second side walls, and in which the
20 mouth of the casing is an aperture between the inside
and out side of the casing, and the mouth is located
between the side walls and the front and back walls
opposite the base.
- 25 3. Fire escape apparatus according to claim 2 in which
one edge of each of the side and front and back walls
are joined to the base.
- 30 4. Fire escape apparatus according to any preceding claim
in which each handle means has an associated handle
channel located within the casing, each handle channel
is dimensioned and configured to allow reversible

-22-

movement of a handle means along the handle channel when the deployment means is reconfigured, and in which a portion of each handle means projects from an end of the associated handle channel when the deployment means is in the deployed configuration, and the projecting portion of each handle means projects through the mouth of the casing.

5. Fire escape apparatus according to any of claims 1 to 3 in which each handle means has an associated handle channel attached to an outside face of, or integral with, a wall of the casing, each handle channel is dimensioned and configured to allow reversible movement of the associated handle means along the handle channel when the deployment means is reconfigured, in which a portion of each handle means projects from an end of the associated handle channel when the deployment means is in the deployed configuration, and the projecting portion of each handle means is adjacent to the mouth of the casing.

6. Fire escape means according to claim 4 or 5 in which each channel is provided with stop means to limit the movement of the handle in the channel means between a stored position and a deployed position.

7. Fire escape apparatus according to any preceding claim in which the spacer means is adapted to move from a storage position to a deployed position.

8. Fire escape apparatus according to claim 7 in which

-23-

the spacer means when in the storage position is at least partially within the casing.

9. Fire escape apparatus according to claim 7 or 8 in which the spacer means is pivotally engaged with at least one handle means, and the spacer means may pivot relative to the handle means when the deployment means is reconfigured.

10. Fire escape apparatus according to claim 9 in which the spacer means comprises a first and second lateral bar deposited substantially parallel to each other, each lateral bar being pivotally engaged with a handle means substantially at a first end and fixed to a spacer bar extending between the first and second lateral bars substantially at or adjacent to the second end.

11. Fire escape apparatus according to claim 10 in which each lateral bar includes a grip portion at or adjacent to the second end of said lateral bar.

12. Fire escape apparatus according to any preceding claim in which the deployment means further includes a second ladder means, said second ladder means being shorter than the flexible ladder, and in which the second ladder means is adapted to move from a storage position to a deployed position.

13. Fire escape apparatus according to claim 12 in which second ladder means when in the storage position is at

-24-

least partially within the casing.

14. Fire escape apparatus according to claim 12 or 13 in which the second ladder means includes at least one ladder support means, at least two rungs, and at least one rung support means, and in which the ladder support means is pivotally engaged with at least one handle means, and the ladder support means pivots relative to the handle means when the deployment means is reconfigured.

15. Fire escape apparatus according to claim 14 in which the ladder support means comprises first and second support bars deposited substantially parallel to each other, each support bar being pivotally engaged with a handle means substantially at a first end and engaged with a rung support means substantially at the second end.

16. Fire escape apparatus according to claim 14 or 15 when dependent on claim 11 or 12 in which the spacer means and the ladder support means are each pivotally attached to a single pivot means on each handle means to which they are attached.

17. Fire escape apparatus according to any of claims 14 to 16 when dependent on claims 9 or 10 in which the spacer means and the ladder support means pivot in opposite directions when the deployment means is reconfigured.

-25-

18. Fire escape apparatus according to claim 16 or 17 in which at least one of the pivot means is provided with one or more stop means, said stop means being adapted to limit the angle through which at least one of the spacer means and the ladder support means may pivot.
19. Fire escape apparatus according to claim 17 or 18 in which the spacer means and the ladder support means are each provided with one or more stop means, said stop means being adapted to limit the angle through which the spacer means and the ladder support means may pivot relative to either the handle means or each other.
20. Fire escape apparatus according to any preceding claim in which there are two handle means, at least a portion of the mouth of the casing extends between the handle means when in deployed position.
21. Fire escape apparatus according to any preceding claim in which each handle means has a substantially straight longitudinal axis, and a first end of the handle means is configured to be easily gripped in a human hand.
22. Fire escape apparatus according to any preceding claim in which the flexible ladder is comprised of a plurality of rungs, said rungs being fixed at substantially even spacings to a pair of longitudinal flexible rung supports.

-26-

23. Fire escape apparatus according to any preceding claim in which one end of said flexible ladder is fixed to the base of the casing.

5

24. Fire escape apparatus according to any preceding claim in which one end of said ladder is adapted to releasably engage with the spacer means.

10

25. Fire escape apparatus according to claim 24 in which re-configuration of the deployment means from the storage configuration to the deployed configuration causes the spacer means to pull the end of the ladder releasably engaged with the spacer means through the mouth of the casing.

15

26. Fire escape apparatus according to any preceding claim in which there is further provided a removable closure means adapted to close the mouth of the casing.

20

27. Fire escape apparatus according to claim 26 in which the closure means is provided with at least one seal means adapted to produce a substantially liquid and or gas tight seal when the mouth of the casing is closed.

25

28. Fire escape apparatus according to claim 26 or 27 in which the closure means is further provided with one or more latch means adapted to latch the closure means in a closed position.

30

29. Fire escape apparatus according to any preceding claim

-27-

in which the deployment means further includes a power source adapted to cause the deployment means to be reconfigured from the storage configuration to the deployed configuration once activated by an actuation means.

5

30. Fire escape apparatus according to claim 29 when dependent on any of claims 26 to 28 in which removal of the closure means from the mouth of the casing causes the actuation of the energy source.

10

31. Fire escape apparatus according to claim 29 or 30 in which the energy source is one or more compression springs, each of said springs being held in a compressed state by a latch means, and in which the actuation means causes release of the latch means.

15

32. Fire escape apparatus according to any of the preceding claims in which the apparatus is adapted to be fixed to a building.

20

33. Fire escape apparatus according to claim 32 in which the apparatus is adapted to be fitted beneath a window of the building.

25

34. Fire escape apparatus according to claims 32 or 33 in which the wall of the casing includes one or more fluid tight passages, interconnected with each other, an input port and an output port.

30

35. Fire escape apparatus according to claim 32 or 33 in

-28-

which the building has a structural frame, an inner skin and an outer skin, and in which the apparatus is adapted to be fixed to the structural frame between the inner and outer skins, and the mouth of the casing faces upwards.

36. Fire escape apparatus according to claim 35 when dependent on any of claims 26 to 28 in which the closure means forms a window sill.

37. Fire escape apparatus according to any of claims 1 to 31 in which the apparatus is adapted to be used on a sailing vessel.

38. Fire escape apparatus according to claim 37 in which the apparatus is adapted to be fixed to the hull of the vessel adjacent the junction of the hull and a deck.

39. Fire escape apparatus according to any preceding claim in which the apparatus is further provided with means to detect a change in the configuration of, or movement within, the apparatus, and communication means in which the communication means may communicate the detection of that change or movement to a monitoring device, or an indicator means.

40. Fire escape apparatus according to claim 39 in which the communication means sends one or more communications via electromagnetic radiation or via fixed wires.

-29-

41. Fire escape apparatus according to claims 39 or 40 in
which the communication means communicates detection
of the change or movement to an emergency service or
5 to apparatus which, in turn, causes a fire alarm to
sound.

10

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 March 2001 (29.03.2001)


PCT

(10) International Publication Number
WO 01/21926 A1

- (51) International Patent Classification⁷: E06C 9/14, B63B 27/14
- (21) International Application Number: PCT/GB00/03650
- (22) International Filing Date:
21 September 2000 (21.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
9922185.5 21 September 1999 (21.09.1999) GB
- (71) Applicant and
(72) Inventor: WILLIAMS, Kevin, David [GB/GB]; 40 Bryn Mawr Avenue, Ammanford SA18 2DA (GB).
- (74) Agent: GALLAFENT, Antony, Xavier; Urquhart-Dykes & Lord, Alexandra House, 1 Alexandra Road, Swansea SA1 5ED (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: FIRE ESCAPE APPARATUS

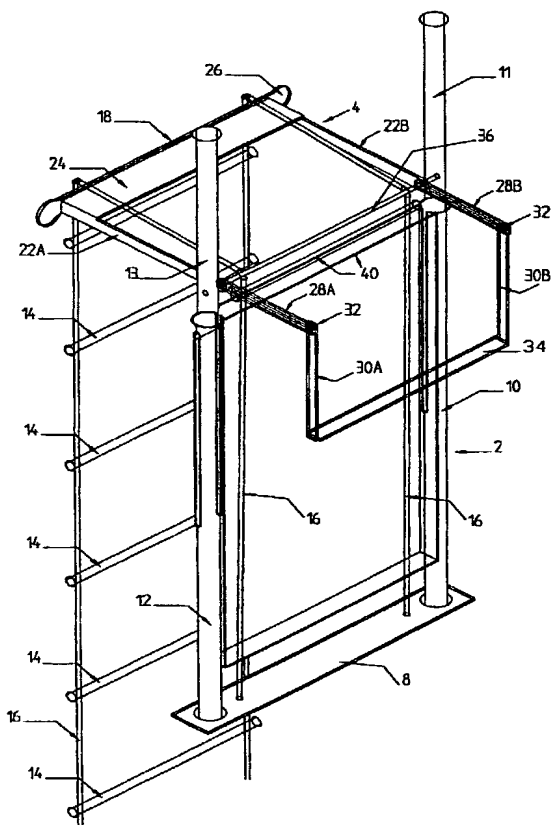

(57) Abstract: Fire escape apparatus suitable for use in locations where escape requires a movement from a first level to a second lower level is described. The apparatus comprises a casing (40), a flexible ladder (14, 16), and a means for deploying said ladder (11, 22, 24). The casing (40) has a mouth and is of sufficient dimensions to contain the flexible ladder (14, 16) when not in use. The deployment means (11, 22, 24) includes a spacer means (22, 24) and one or more handle means (11). The deployment means may be reversibly reconfigured between a storage configuration and a deployed configuration. The casing may be built into the structure which is to be escaped from, and the ladder is protected, when not in use, by the casing.

WO 01/21926 A1

Fig 1

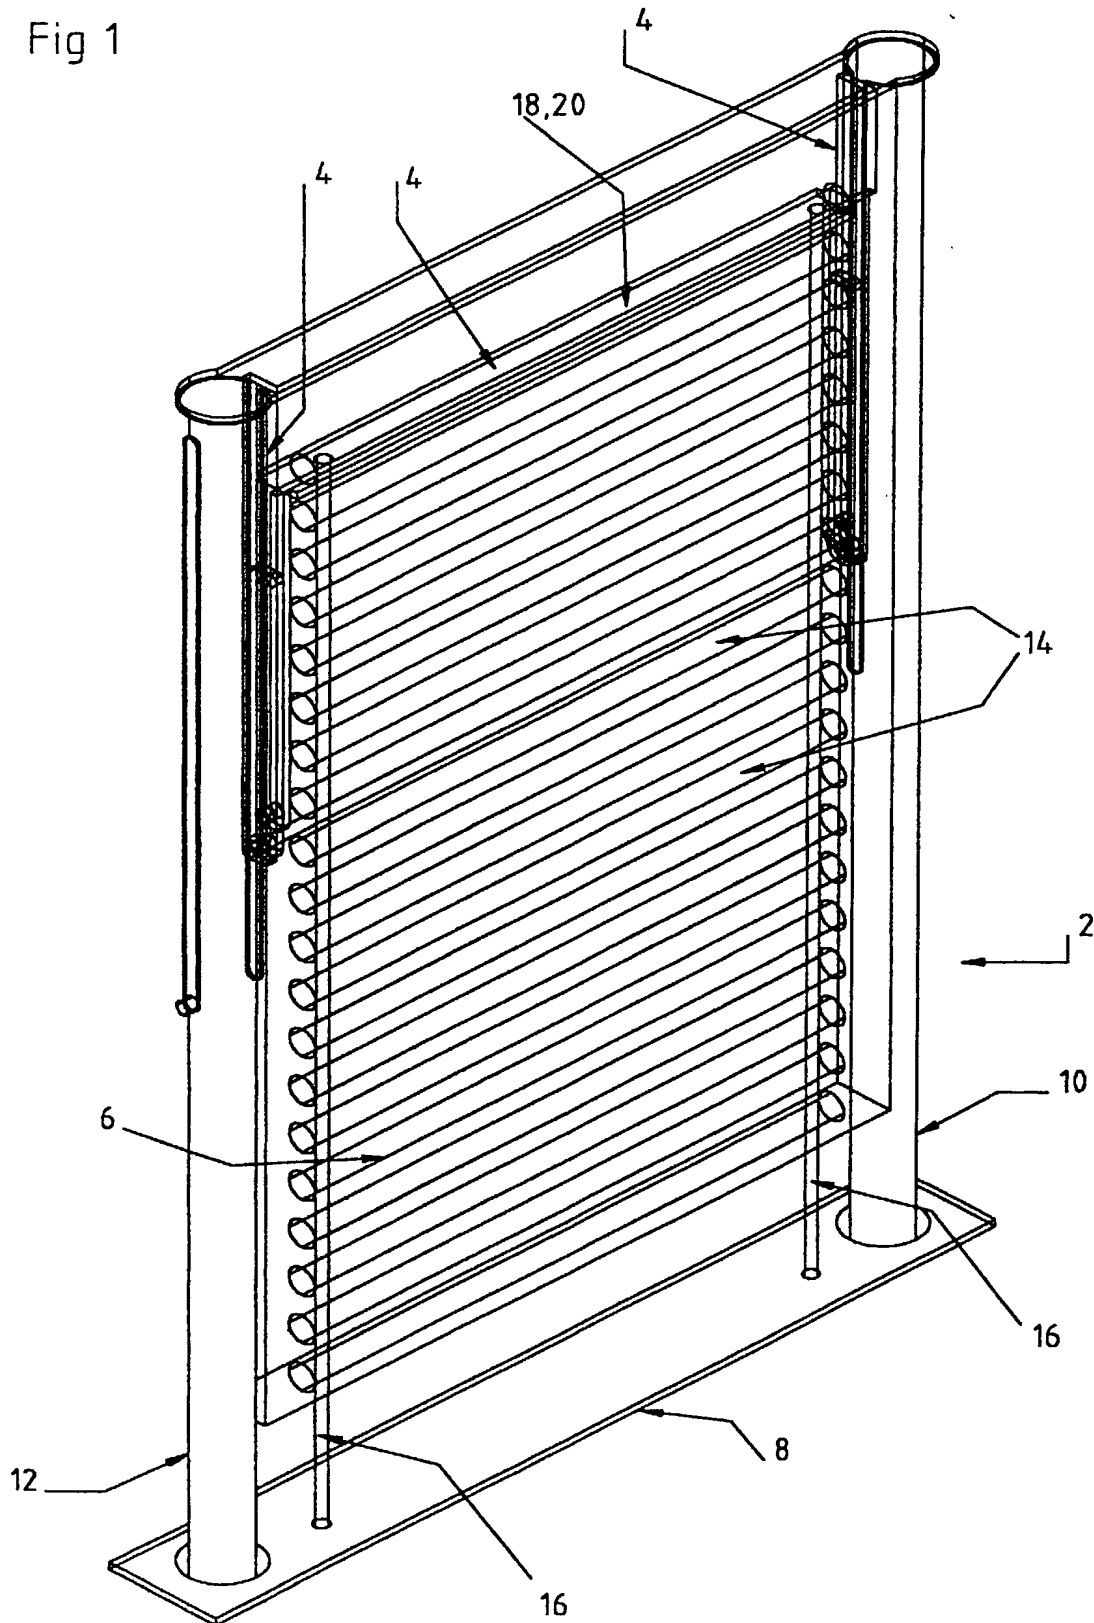


Fig 2


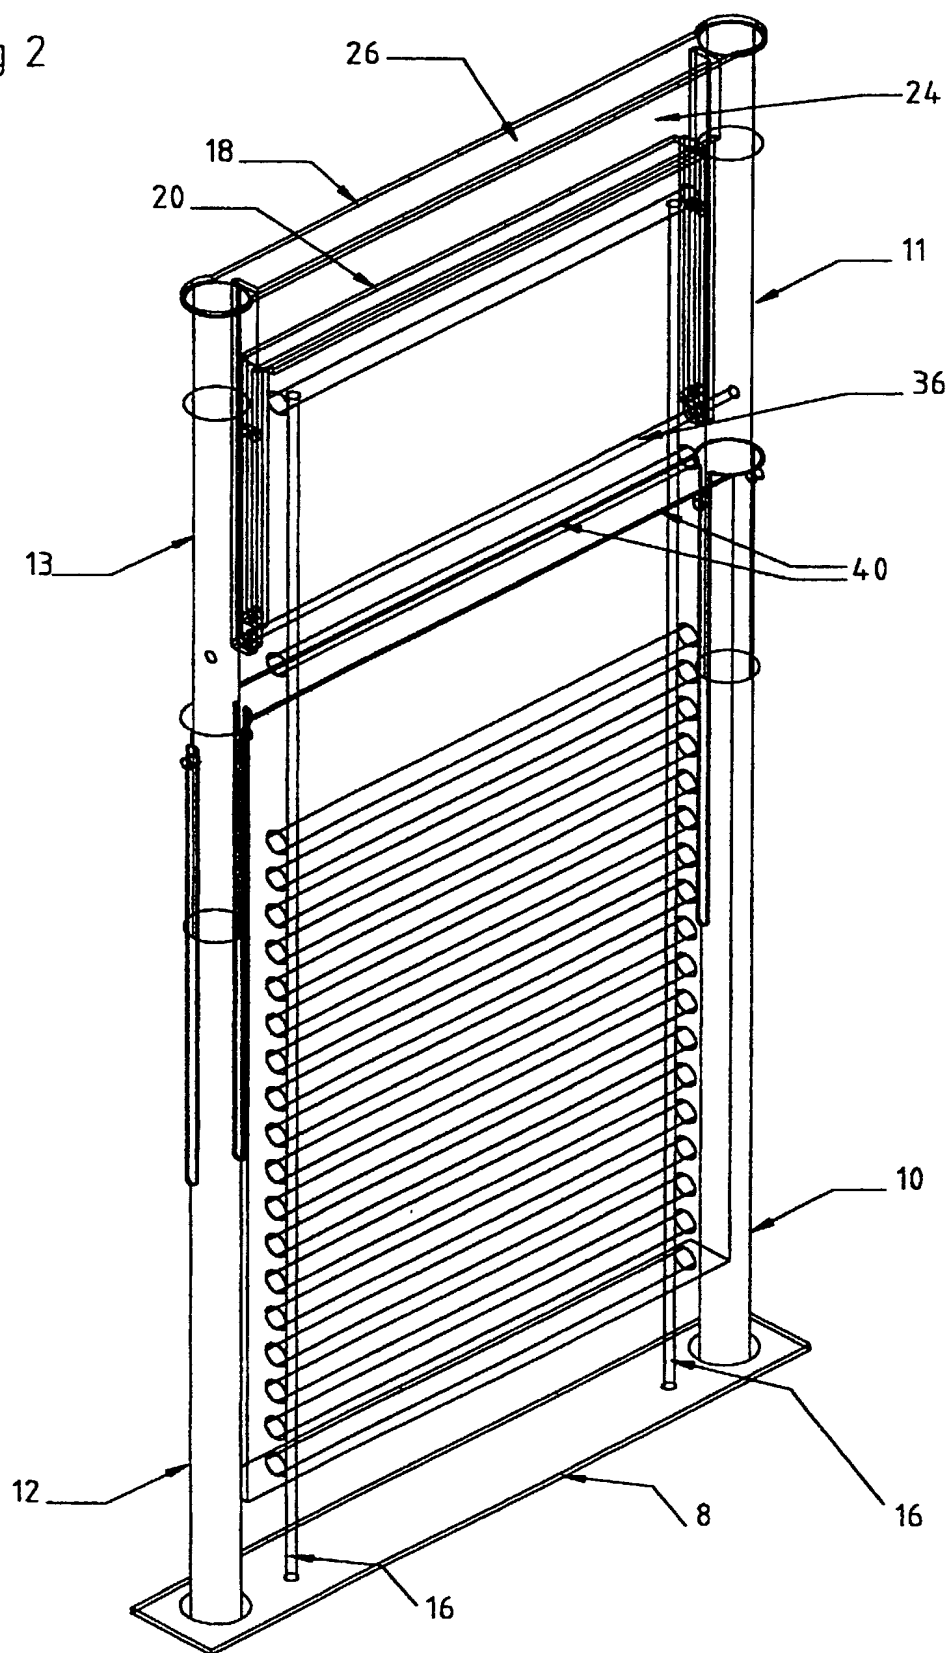


Fig 5

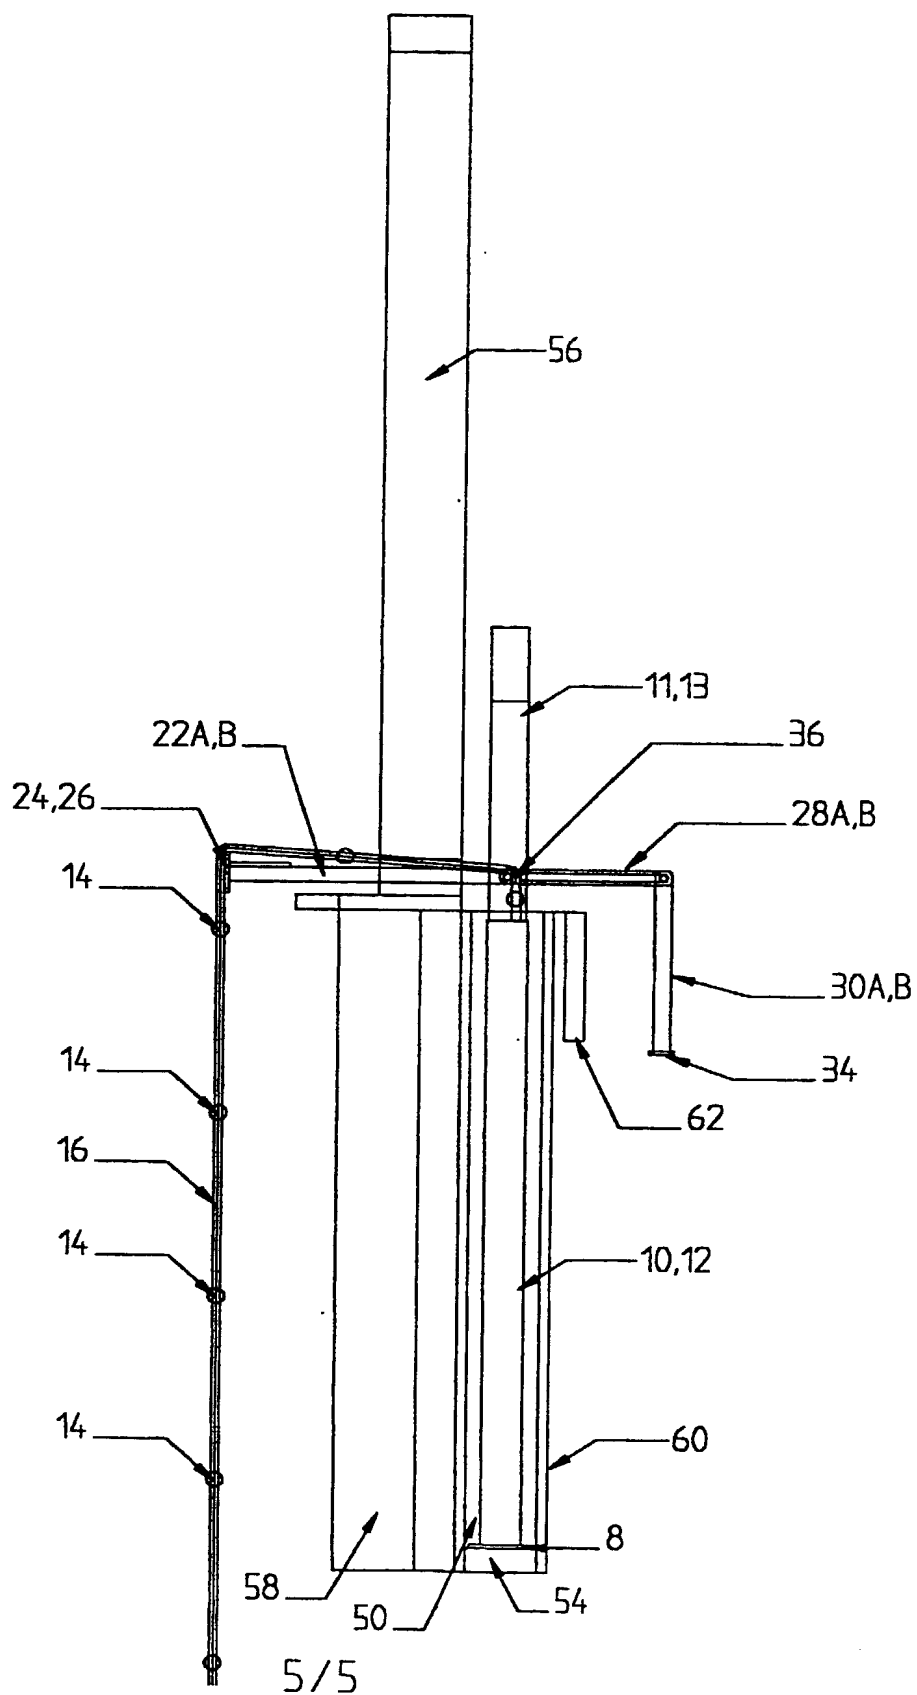

5/5

Attorney's Docket No. N8382-EAS-Urq

having a filing date before that of the application on which priority is claimed:

Prior Foreign Appln. No.	Country	Foreign Filing Date	Priority Not Claimed
9922185.5	GB	09/21/1999	<input type="checkbox"/>

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorneys and agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Mark J. Patterson (Reg. No. 30,412)
I. C. Waddey, Jr. (Reg. No. 25,180)
Edward D. Lanquist, Jr. (Reg. No. 33,729)
Lucian Wayne Beavers (Reg. No. 28,183)
Emily A. Shouse (Reg. No. 44,336)
David B. Pieper (Reg. No. 42,998)
Richard S. Myers, Jr. (Reg. No. 42,022)
Larry W. Brantley (Reg. No. 46,052)
Martha B. Allard (Reg. No. 36,730)
Guy W. Hensley (Reg. No. 41,831)
Douglas W. Schelling (Reg. No. 48,335)

Customer No. 23456

Please direct all correspondence to Emily A. Shouse at the address and telephone number below.


Attorney's Docket No.: N8382-EAS-Urq

Emily A. Shouse
Wadley & Patterson
414 Union Street, Suite 2020
Bank of America Plaza
Nashville, TN 37219
(615) 242-2400

1-00 Full name of sole Inventor:

Kevin David Williams

Inventor's signature:



Date:

23/07/02

Residence:

40 Bryn Mawr Avenue
Ammanford SA18 2DA
Great Britain

Citizenship:

Great Britain

GBN

Post Office Address:

40 Bryn Mawr Avenue
Ammanford SA18 2DA
Great Britain